

TruBlu™ Mesh Time Management Controller with Long Range Antenna

Overview

- Bluetooth® NLC Certified
- System Time Management with 30-day Backup
- Single Channel Controller with 0-10VDC Dimming Output
- Integral Long Range Antenna
- Features High End Trim Adjustment, Zoning & Continuous Dimming
- Optional Load Control Output (active high)
- Powered by 12 to 24 VDC
- IP65 Rated for Outdoor or Indoor Applications
- Mounts to Light Fixture/Luminaire via Quick Connect Receptacle
- Conforms with DLC NLC5 Cybersecurity



For Indoor or Outdoor use



Applications

The PSC-ZKV-TMC product is a Time Management device with battery back-up that can last at least 30 days. The device is also a 0-10V single channel wireless fixture controller with a long range antenna.

The controller is IP65 rated for exterior use and suitable for a variety of indoor and outdoor applications in temperatures ranging from -22° to 158°F (-30° to 70°C).

This device is Bluetooth® NLC certified and controlled wirelessly via Bluetooth Mesh technology allowing for wireless dimming of luminaires. The compact size allows for seamless integration to the fixture.

Accessories

Power Pack: The PSC-ZKV-TMC-100-BLE-SR/EXA operates on 12 to 24 VDC input. See the mwConnect PacWave™ Power Pack products for low voltage power supply options.

Alternatively, the controller can also operate with a driver that has auxiliary output (12 to 24VDC).

Operation

TruBlu™ Mesh Controls: The PSC-ZKV-TMC controller is a Bluetooth NLC certified device by the Bluetooth SIG and offers true multi-vendor interoperability. Configuration of the device and mesh network is accomplished via the TruBlu web portal or iOS mobile app. The app is used for initial setup and subsequent parameter adjustment.

Advanced functionality such as energy monitoring, and demand response is available with the TruBlu Gateway (ordered separately).

Single Channel: The controller outputs a 0-10V dimming channel for driver control.

Relay Control: 10-22VDC active high output to control relays or other control circuitry (-100 model only).

Quick Connector: The controller mounts to a Z10 0-10V receptacle (mwConnect part# ZKV-R1L). One receptacle is required for mounting each controller.

See the TruBlu™ Commissioning User Manual for more information.

Summary

Product Type:
Time Management Fixture Controller with Long Range Antenna

Input Voltage | Current Consumption:
12 to 24 VDC | 100 mA

0-10V Dimming Output: 30 mA

Load Control Output—Active High
Vin-2.5 V 30 mA

Fixture Mount:
Quick-Connect receptacle, sold separately

Max Bluetooth Range¹:
1200 feet (366 meters)

Operating Temperature:
-22°F to 158°F (-30°C to 70°C)

Storage Temperature:
-40°F to 185°F (-40°C to 85°C)

Relative Humidity:
90-95% non-condensing at 30°C

Color: Clear/Transparent Housing

Warranty: 5 years


Note:

1. Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for Bluetooth range accuracy.

Project


Location/Type

Physical Dimensions

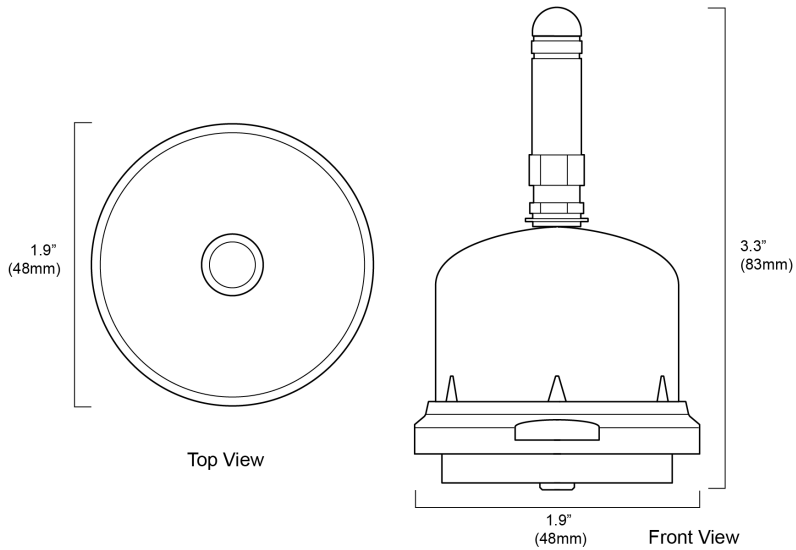

Drawings are not to scale

Product Wiring—Z10 0-10V Base Model



View of Back of Device




View of Z10 0-10V
Device Receptacle

Tab/Slot	Designation	Notes
T1	12-24VDC+ Power to Sensor-Controller	Red Wire (ZKV-R1L Receptacle)
T2	12-24VDC- Power and 0-10VDC-/Common	Black Wire (ZKV-R1L Receptacle)
T3	0-10VDC+ Control Signal from Sensor-Controller	Purple (Violet) Wire (ZKV-R1L Receptacle)
T4	10-22VDC 30mA Load Control Output (Active High)	Yellow Wire (ZKV-R1L Receptacle)

For Wiring Diagrams featuring the PSC-ZKV product series, visit the following link:

<http://mwconnect.us/wiring/PSC-ZKV>

Installation Of Sensor-Controller

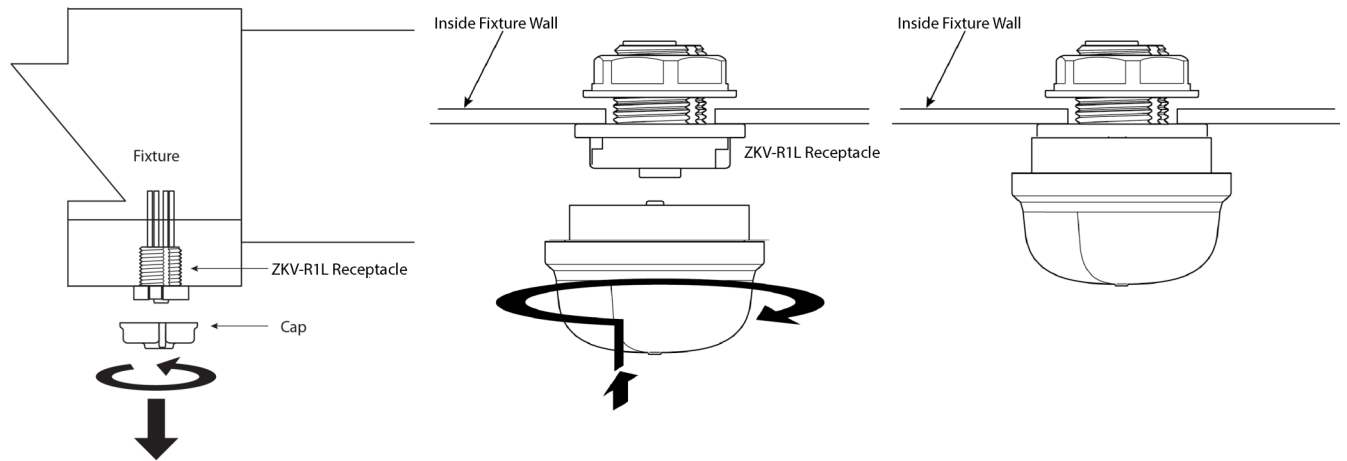



To install a ZKV device, first remove the protective cap on the ZKV-1RL or Zhaga Book 18 receptacle by pushing up and rotating counterclockwise.

To install ZKV devices insert, push in and rotate clockwise to lock. No tools are required. Luminaires can be easily and quickly upgraded.


The receptacle for ZKV devices is typically installed by a luminaire manufacturer and is shipped to the job site with a protective cap.

Reset Instructions

Using a magnet (with 20lb pull strength), hold the magnet against the dot labeled RST (reset).

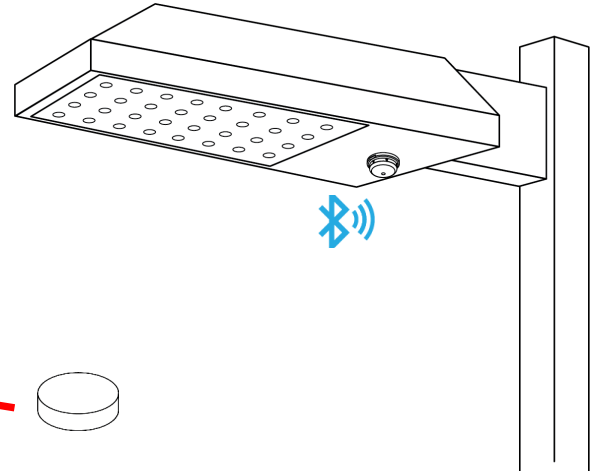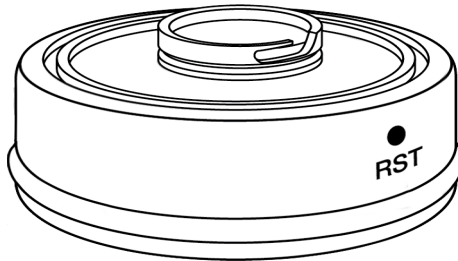

Once the fixture associated with the controller has flashed 3 times then stayed on, remove the magnet. The controller is now reset to factory conditions and ready to be reprogrammed

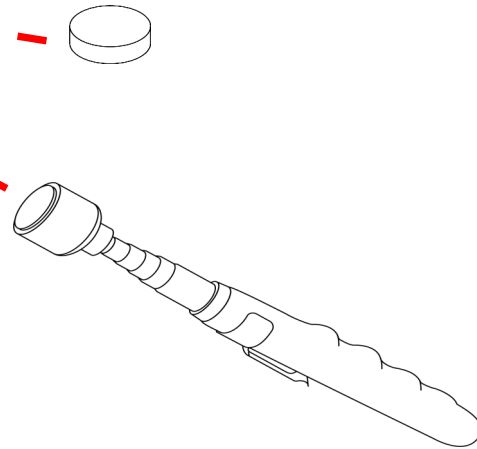

How To Order

Model No.	Description	Input Voltage	Output
PSC-ZKV-TMC-100-BLE-SR/EXA	TruBlu Mesh Time Management 0-10V Controller with Long-Range Antenna, Clear Housing	12-24VDC	Load Control 0-10V Dimming
PSC-ZKV-R1L	ZKV Z10 0-10V Quick-Connect Receptacle for use with Controllers, Black Finish		

For Line to Low Voltage Power Supply/Controller, please see mwConnect PacWave™ Power Pack data sheets
Design and specifications are subject to change without notice.