


Main Features:



- Input Voltage: 120~277Vac
- Output Wattage: Constant Current (C.C.) at 55W
with Adjustable Current Setting
- Flicker-Free : Active PFC 2-Stage Switch Mode
- Programmable Method: Wire
- High Efficiency: Up to 85%
- Dimming Function: 0-10V with Dim to off (dto)
- Smooth & Continuous Deep Dimming : 100% to 1%
- Lightning Protection: Built-in [Line to line 2.0kV, line to ground 4.0kV]
- Reliability Protection: SCP, OTP, MTP, OCP, OVP
- Safety Regulation: Complies with UL8750
- Complies with CA Title 24 & FCC Class A
- **Class P** UL standard for retrofit kit
- **Five Year** Warranty under Normal Usage Conditions

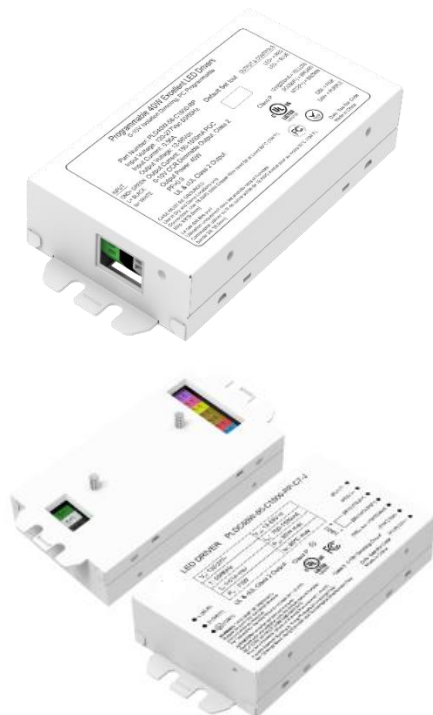

SPECIFICATION

Model No. (*)	Output Voltage Range	C.C. or C.P. Programmable Rated Output or Range	Programming Method	Dimming Control Method	Aux
LDD-www(D)vvv(P/F)ccccHH-(V/D)	(Vdc)	(mA) (i)			(Vdc)
LDPY055D55P1500-U-V	12 - 55	700 - 1500	Analog/Wire	0-10V	12
LDPY055D55P1500-U-V-N	12 - 55	700 - 1500	Analog/Wire	0-10V	12
<p>(*) model name pattern: LDD-www(D)vvvPxxxx-U-V(N) LDD means, LED Driver with C.C. (D) means, 12V Aux (P/F) means, Wire/Wireless Programming method (V/D) means, Analog Voltage/Digital DALI Dimming method (N) means stub</p> <p>(i) Pre-set Constant Current Value with dimming Case Temp: Tc: 90°C MTP (Module Temperature Protection) :supports thermal feedback and robust thermal manage,LED module working temperature can automatically be reduced by the driver, setting by software of the output current decrease depending on the measured NTC value to avoid decreased lifetime of the LED module. SCP (Short Circuit Protection): No Damage. Auto recovery after short is removed. OCP (Output Over Current) Constant Current Limiting circuit 110% IO. OTP (Over Temperature Protection): 90-110°C, > Tc Typ. value, Current derating; < Tc Min. value, Current recovery. OVP (Output Over Voltage) No Damage. Auto recovery after the abnormal disappearance 110% Vo.</p>					

LED Driver C.C. 55W PC Programmable Series

(in Plastic Case version)

Input Spec.	Condition Description	Min.	Normal	Max.	Units
Input Voltage Range	Universal Input	108	120/277	305	VAC
Input Frequency Range		47	50/60	63	Hz
Input Current	At 120 VAC/277 VAC input, full load output			0.61/0.25	A
Power Factor	At 120 VAC/277 VAC input, 25°C full load		>0.9		
Inrush Current	At 120 VAC input, 25°C cold start / At 277 VAC input, 25°C cold start			35/75	A
Leakage Current	@277Vac 60Hz			750	uA
Surge Protection	Differential and common mode, combination wave			2K/4K	V

Output Spec.	Condition Description	Min.	Normal	Max.	Units
Current Accuracy	At 25°C, @120Vac & 277Vac, full load		±5		%
Ripple Current	At 25°C, full load, measured at 20MHz bandwidth. The result differs according to different LED load characteristic.			5	% Ip-p (Io)
Overshoot/Undershoot	% of I out max & LED load, at 25°C, measured at 20MHz bandwidth			5	%
Turn-On Delay	Measured at 120Vac/277Vac input and Full Load			0.5	S
Aux Output Voltage	Aux out current 200mA max		12		Vdc

General Spec.	Condition Description	Min.	Normal	Max.	Units
Efficiency	120Vac 277Vac measured at 25°C, full load	83 84	84 85		%
MTBF	For 12V output model, measured at 120Vac input, 100%Load and Tc=85°C, with a failure probability of less than 10%		--		Hours
Lifetime	at Tc < 80°C Full load and nominal input condition		≥50,000		Hours
Operating/Storage Temperature	95%RH/95%RH	-40/-40		45/85	°C
Dimension (L x W x H)	Length x Width x High	126 / 116 x 60.1 x24.0			mm
		4.96/4.57 x 2.37 x 0.95			inch
Weight	Net weight without package				lb/kg


Safety & EMC Compliance	Category	Condition Description
Safety Regulations	UL8750	Light Emitting Diode (LED) Equipment for Use in Lighting Products, Class 2
	Dielectric Strength (Hi-POT)	Primary to Secondary: 1600Vac /10mA max / 60 seconds (3 seconds for production)
	Insulation Resistance	10M ohm min. @primary to secondary
EMI Standards	FCC	FCC 47CFR Part 15 Class A@ 120Vac, Class A@277Vac
	Energy Star	Surge Immunity Test: NEMA SSL1 – 2010Non-Roadway,100KHz ring wave, 2.5KV, common and differential mode.

■ Dimming Curve


Items	Parameter	Min.	Typ.	Max.	Notes /Conditions
12V Auxiliary Output	Output Voltage	10.8 V	12.0 V	13.2 V	Yellow Wire
	Output Current	0 mA	---	200 mA	Yellow Wire
0/1-10V Dimming	Input Absolute Voltage	-2.0 V	10 V	15 V	Purple Wire
	Output Source Current	---	---	200uA	Purple Wire
	Output Current Range in 0/1-10V Dimming	0%	---	100%	DIM+/DIM- Reverse connection is prohibited
	Output Current in 0/1-10V Pin Open	---	Normal	---	It's a constant current output with active PFC.
	Output Current in 0/1-10V Pin Short Circuit	---	0	---	CCR output
PWM Dimming	Input Absolute Voltage	8.5 V	10 V	15 V	
	Input Current on PWM pin	---	---	---	
	PWM Frequency	200 Hz	---	2 KHz	
	PWM Duty	0 %	---	100%	
	Output Current Range in PWM Dimming	0%	---	100%	CCR output
	Output Current in PWM Pin Open	---	Normal	---	It's a constant current output with active PFC.
	Output Current in PWM Pin Short Circuit	---	0	---	CCR output
0/1-10V & PWM Dimming	Compatible dimming function: 0/1-10V and PWM dimming.				

Dimming Wire


- . 0-10V Dimming Driver with programmable & NTC control.

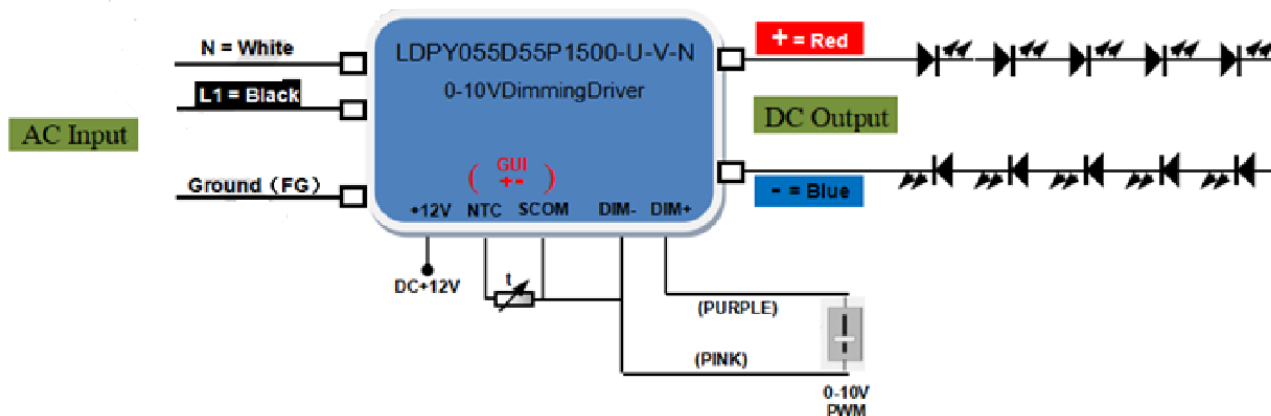

0-10V Dimming Curve@Minimum dimming set to 1:

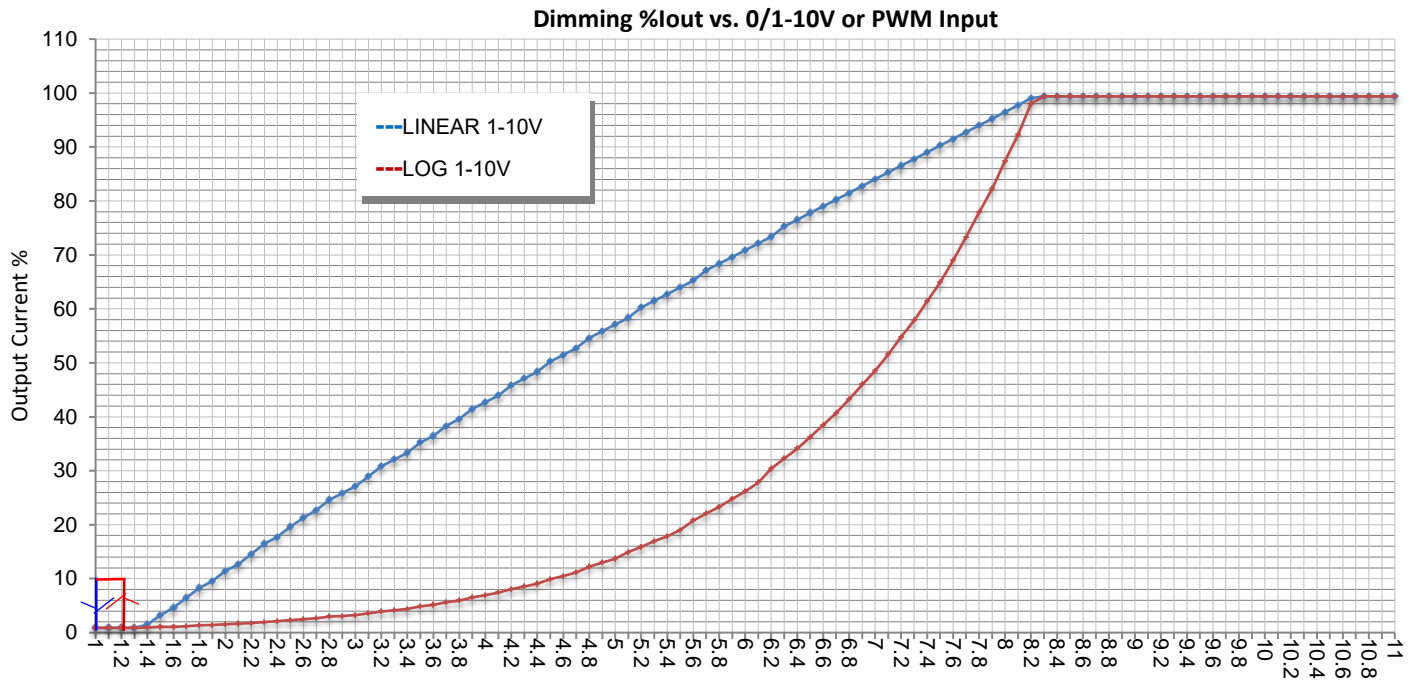

0/1-10V Dimming Curve@ Minimum dimming set to 0%:

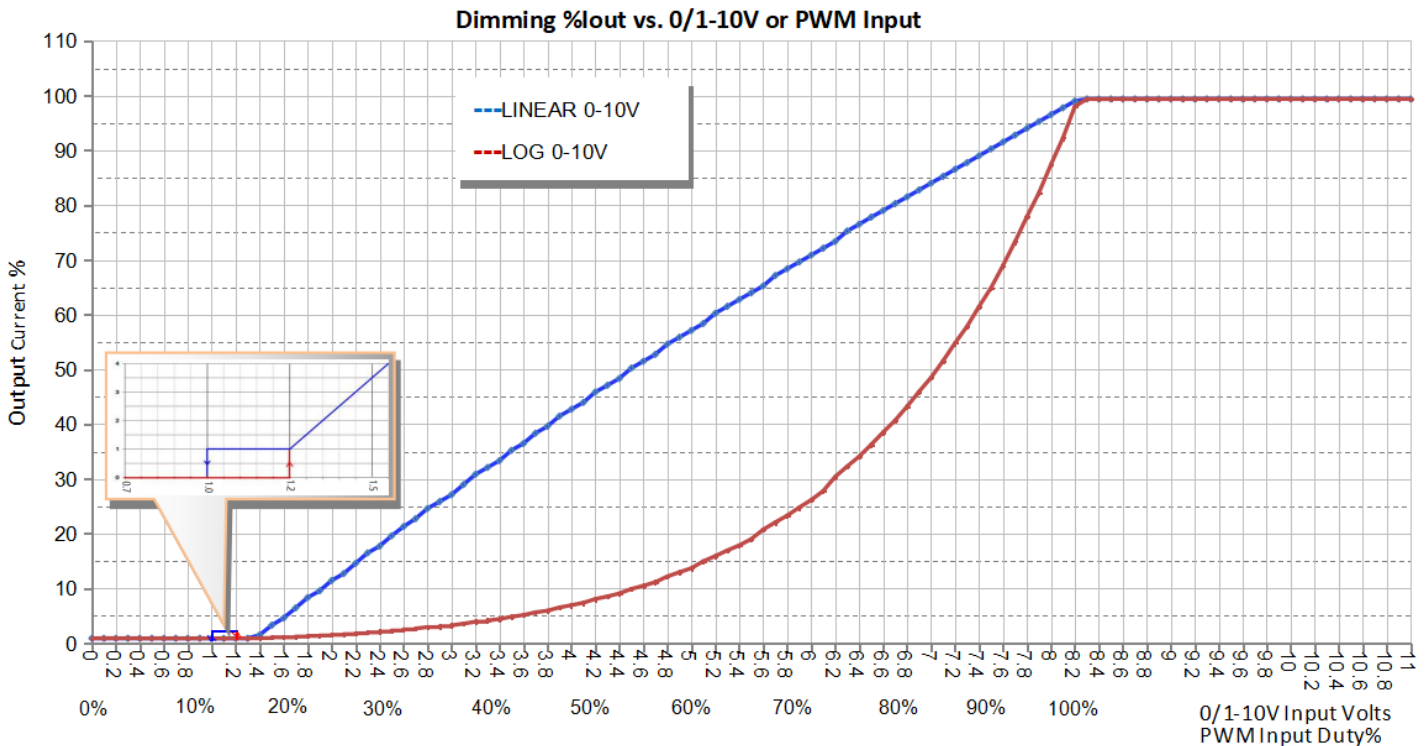


Note :1. The maximum deviation of the 0-10V dimming curve parameters above is ± 0.5 .

2. $V_{dim} (max)$: 8.20 ± 0.20 (8.0-8.4V); $V_{dim} (on)$: 1.25 ± 0.25 (1.0-1.5V); $V_{dim} (off)$: 0.95 ± 0.25 (0.7-1.2V).

3. The above test data are in the condition of 25°C ambient temperature.

NTC Current Control

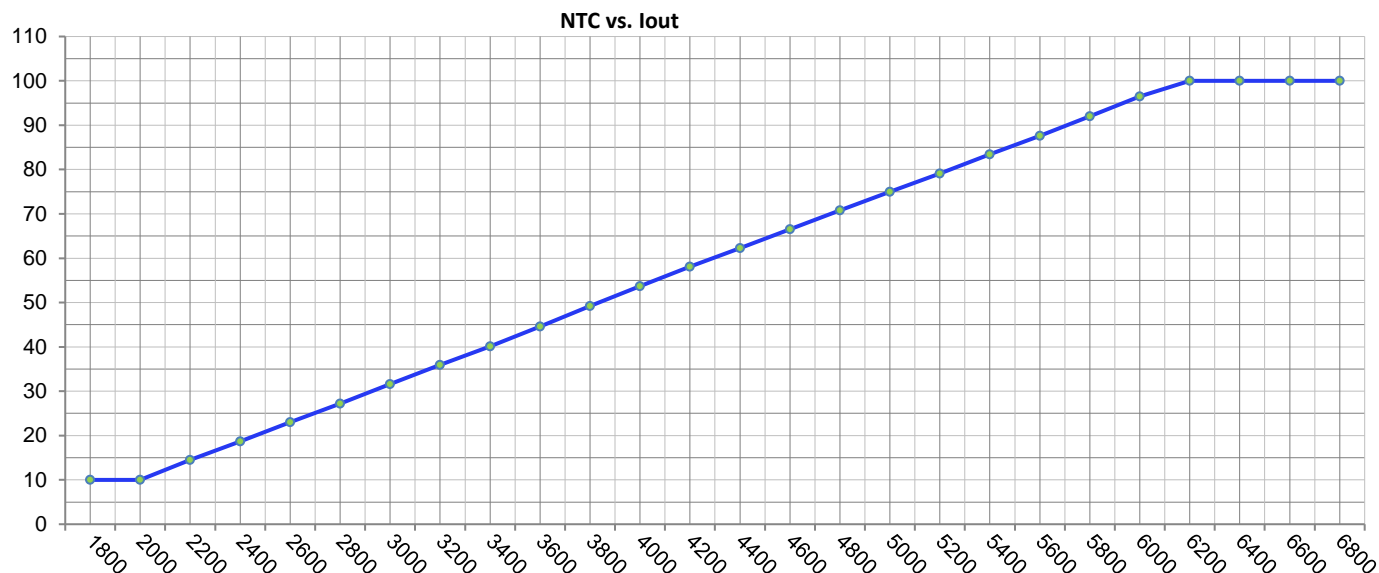

Note: Maximum dimming current is limited by NTC.


NTC values, NTC High, NTC Low and NTC Minimum I_{out} can be programmed.

Using Programmer USB interface & PC based GUI Software.


Default: NTC Low = 2.0K ~ 10% I_{out}, NTC High = 6.3K, 100% I_{out}.

Module Temperature Protection Example

NTC = 0805SMD, R_{25C} = 15K Ohms ± 2%, R_{64C} = 3700, Vishay Part#: NTCS0805E3153GMT

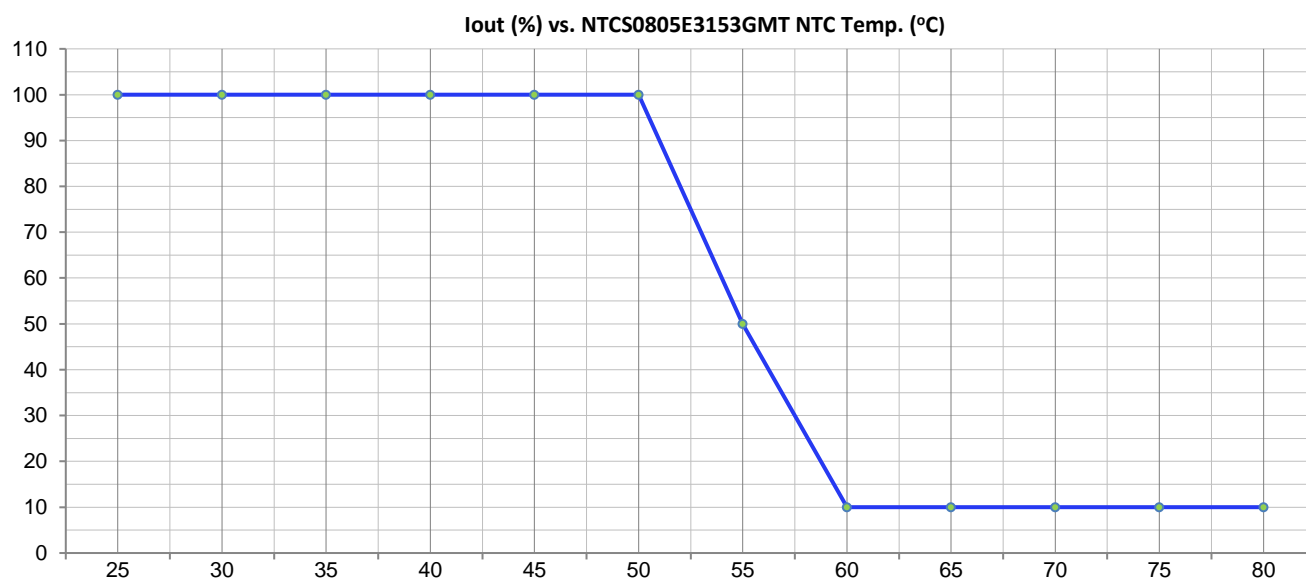


■ Power Operating Window& DLC Window:

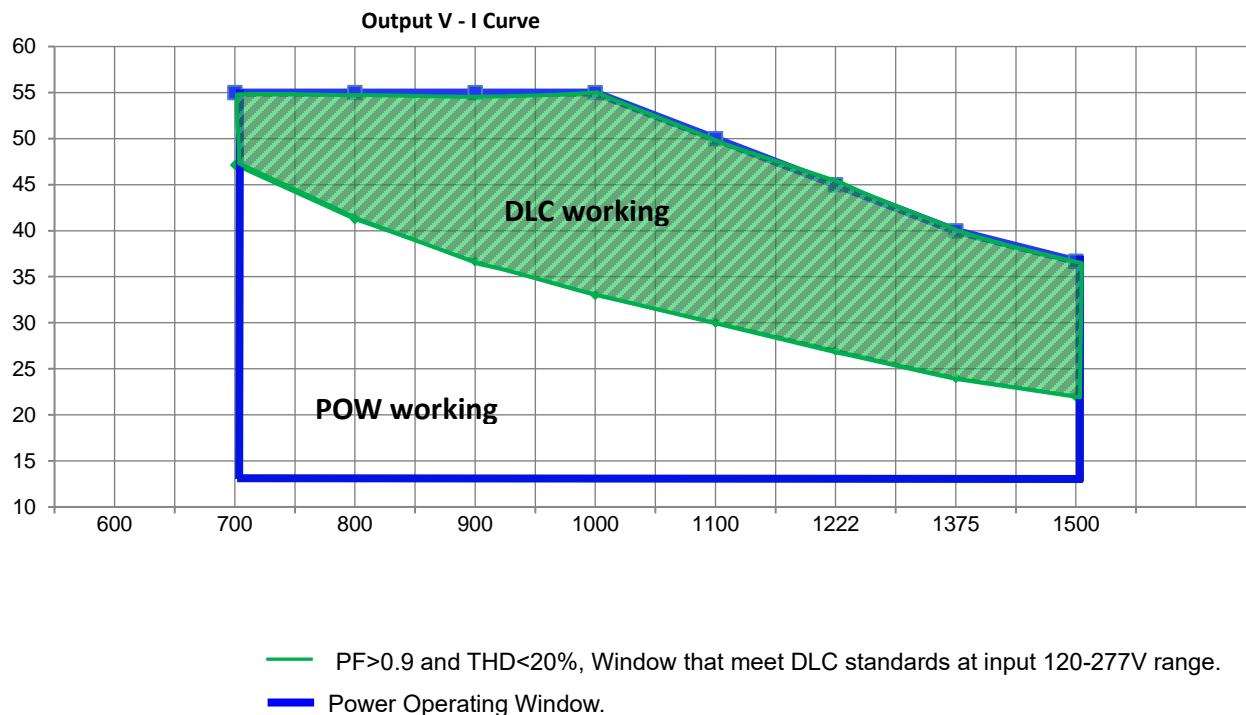

Note: When the output current is set, the output voltage is automatically limited within the curves.

■ Output Current derating vs. TC Temperature Curve :

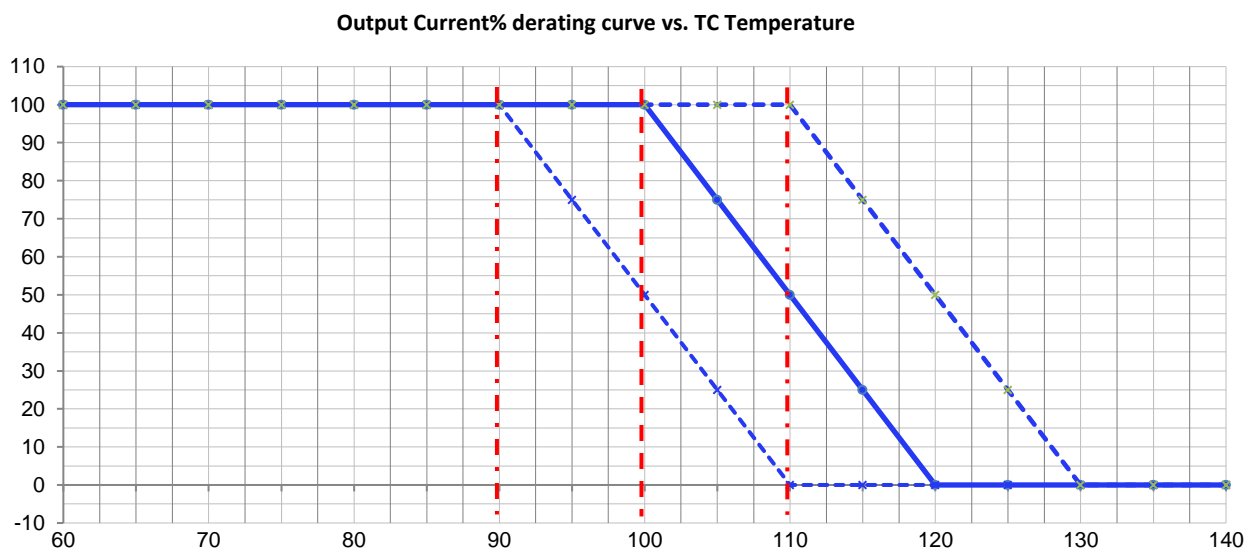


Note:


The temperature control curve is the test result of the technical sample, and the product is not tested.

Affected by the internal temperature distribution of the shell, the test temperature has a large error corresponding to the TC temperature.


■ Lifetime vs. Case Temperature

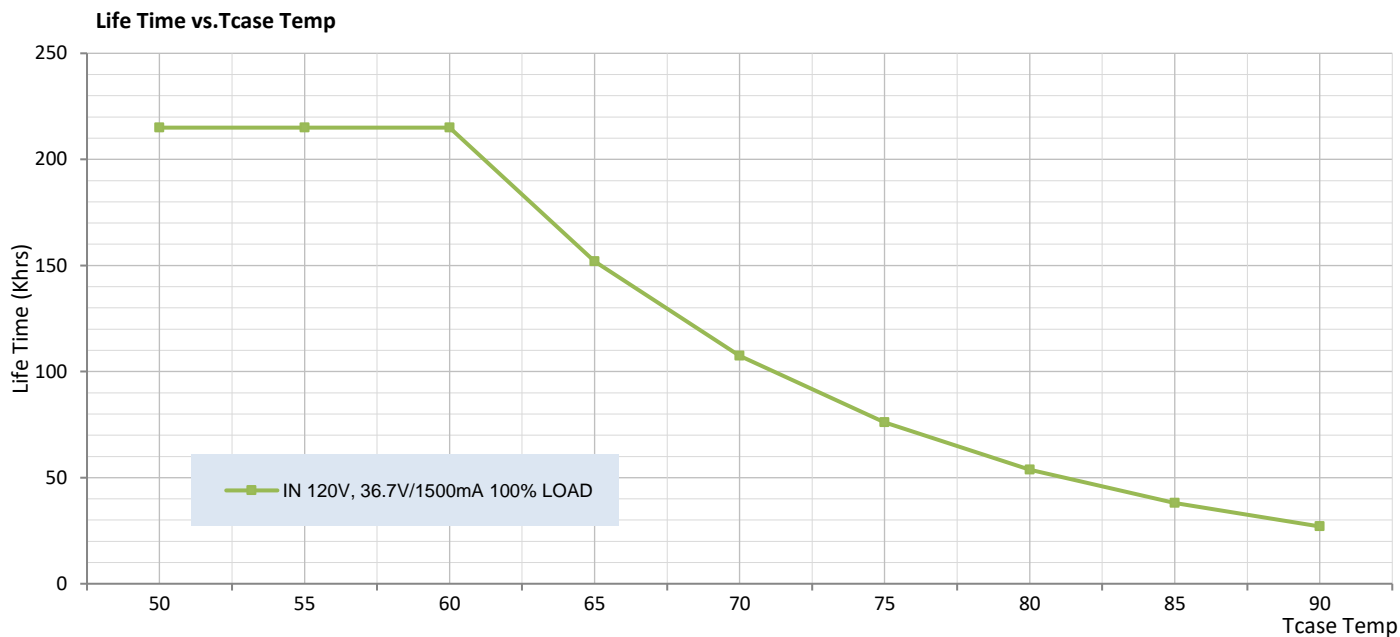


■ Efficiency vs. Load

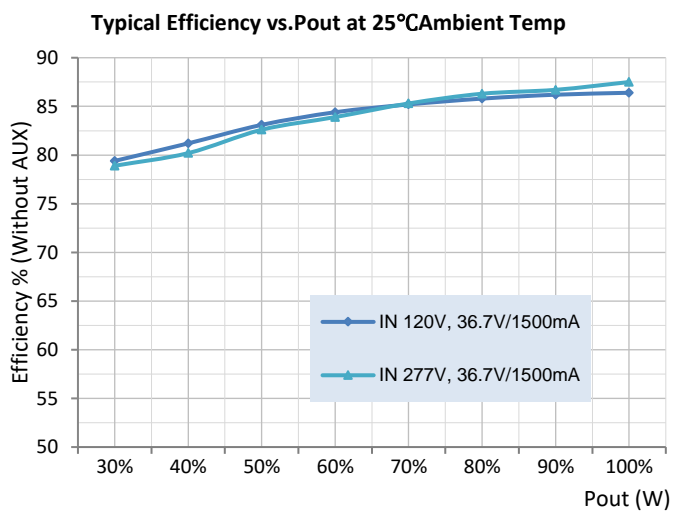

■ Power Factor vs. Load

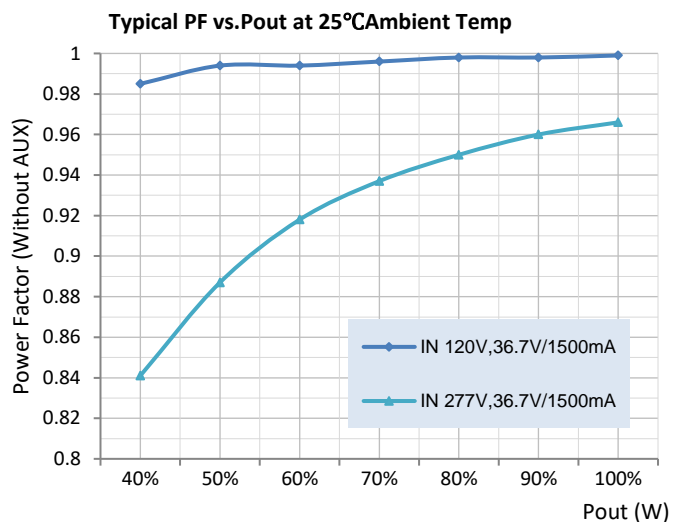

■ THD vs. Load

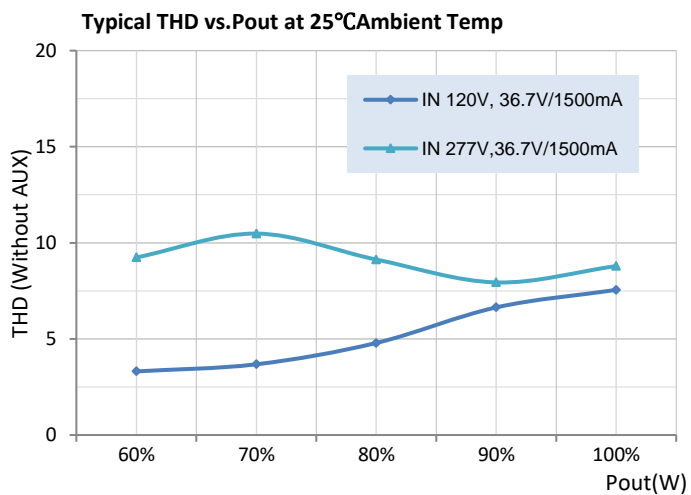

■ Programming:

Programmable Output Current (POC): Programmable I_{out} from 700mA to 1500mA.

Programmable NTC Values:

Default: 2.0K \approx 10% I_{out}, 6.3K = 100% I_{out}

Programmable settings: NTC Minimum Level (%), NTC Minimum Ohms, NTC Maximum Ohms.

Programmable Minimum Dim Level: 0% (OFF) to 100% I_{out} programmed value.

Programming Tool:

The Programmer is a programming and configuration tool for intelligent programmable LED drivers. It consists of the programmer which is connected between the USB port of a computer and the LED driver being programmed, and the programmer software. The programmer software is a PC based graphical user interface that allows the user to program and configure the operating parameters of an Programmable LED Driver. This interface allows the operator to set the LED drivers output current within its specified range. In the increments specified. It also provides the ability to enable/disable and control features like “Dimming”, “Auxiliary Output”, “NTC Thermal Protection”, “Constant Lumen Module” & “End-of-life indicator” when available in the intelligent LED driver being programmed.

Programmer:

Is the physical USB unit connected between the USB port of a computer and the LED driver being programmed?

This unit also provides all power required to the LED driver being programmed. No connection to an AC power source is required for programming the LED driver.

Programmer Software:

The Programmer software is the windows based GUI that allows the user to assign custom part number(s) to the LED driver being programmed. The user can then save the profile to a computer disk and recall as need. The user can then use the “Auto Program” feature to quickly program as many LED drivers with the saved profile as is required. Each driver programming simply requires a click of the mouse to program in a single step.

The Programmer software supports bar code scanners. The barcode scanner can be used to automate the programming of the attached LED driver. The barcodes scanner interface also provides an option to either enable or disable logging of the parameters to an excel file.

Note: The programming of the LED driver does not require the input be connected to an AC power connection. The Programmer and the required LED driver circuitry will be powered from the Programmer module via the USB connection to a computer.

to ensure perfect operation of terminals.



[illegible]

Note:

The independent LED drive conforms to the EMC standard. But it is not guaranteed to be qualified, when the drive is mounted in the LED fixture.

Please forgive us for any discrepancy due to the update of the specifications or the upgrade of the product. If you need the latest information, please contact our marketing department.



LED Driver C.C. 55W PC Programmable Series

(in Plastic Case version)

Revision

Date	Rev.	Description of Change		
		Item		
03/09/2025	V1a			