


ZKV Stem & Swivel Mount Receptacle

Overview

- Fits standard 1/2" Knockout with Swivel Points for Flexible Installation and Positioning
- IP66 Rated, suitable for indoor and outdoor applications
- 12-24VDC Input Voltage
- 0-10V dimming scheme
- Contact Rating: 1.5A, 30VDC (typical 24V)
- Operating Range: - 40°C to 70°C
- Wires: 20 AWG, 105°C




Physical Dimensions

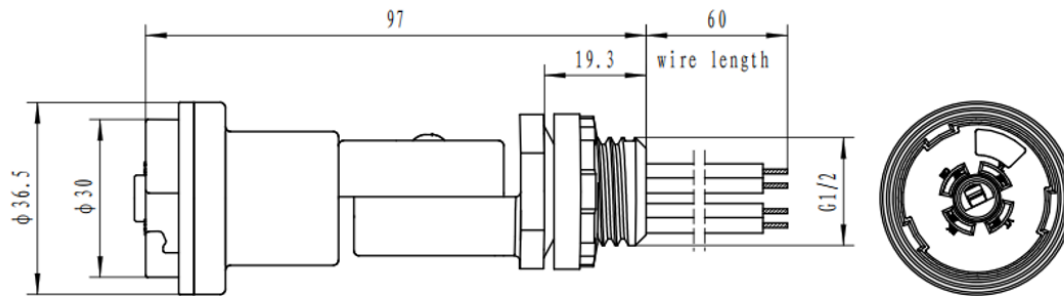

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS
Drawings are not to scale

Wiring

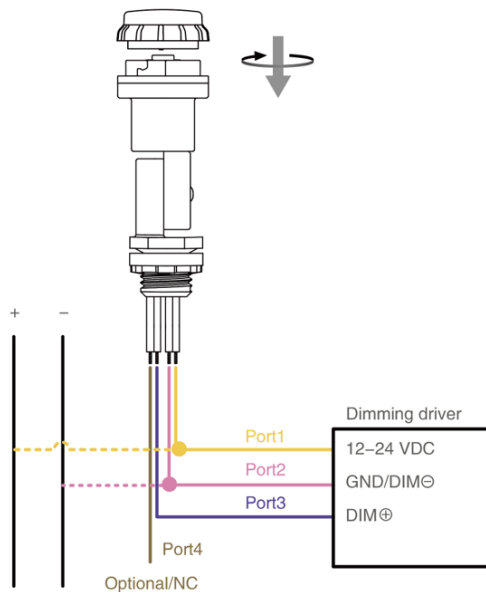

Wires: AWM 1015, 20 AWG, 105°C

- Port 1 (YELLOW): 24 VDC
- Port 2 (PINK): 0~10V - /GND
- Port 3 (PURPLE): 0~10V+
- Port 4 (BROWN): Optional/NC

How to Order

Model No.	Description
PSC-EXT90CZ10-WT	Flexible ZKV Receptacle for Fixture Controller, White
PSC-EXT90CZ10-BN	Flexible ZKV Receptacle for Fixture Controller, Brown
PSC-EXT90CZ10-GY	Flexible ZKV Receptacle for Fixture Controller, Gray

Design and specifications are subject to change without notice.