

Ingy Mesh DALI Outdoor Controller with Long Range Antenna

Overview

- Complies with DALI D4i Specifications
- Single Channel DALI Wireless Controller
- Integral Long Range Antenna
- Mounts to Light Fixture/Luminaire via Zhaga Book18 Quick Connect Receptacle
- Compatible with Ingy Wirepas Mesh Systems
- Features High and Low-End Trim Adjustment, Zoning & Continuous Dimming
- IP65 Rated for Outdoor or Indoor Applications
- 24VDC or DALI Bus Powered Options

Applications

The PSC-ZAD-WCM-100-WPS-NG/EXA is a single channel wireless fixture controller with a long range antenna. This controller is designed to work with a Wirepas mesh system by converting standard Wirepas mesh protocol to DALI protocol.

The controller is IP65 rated and suitable for exterior use.

This device communicates directly with DALI drivers and is controlled wirelessly via Wirepas Mesh technology allowing for wireless dimming of LED lighting. The compact size allows for seamless integration to the fixture.

Two Power Input options are available. The Aux Powered (-100) model requires 24VDC power to operate. The DALI Bus Powered (-200) model uses DALI Bus power to operate. See the product wiring information for wiring designations.

Operation

Ingy Wirepas Mesh: The PSC-ZAD-WCM/EXA controller is compatible with a Wirepas mesh network and configured via Ingy software.

Single Channel Control: The controller provides a single channel of D4i compatible DALI output for driver control.

Quick Connector: The controller mounts to a Zhaga Book 18 compliant receptacle (sold separately - mwConnect part #PSC-ZAD-R1L). One receptacle is required for mounting each controller.

See the Ingy Commissioning User Manual for more information.



For Indoor or Outdoor use



E341446

Summary

Product Type:
Single Channel Wireless DALI Controller with Long Range Antenna

Input Voltage | Current Consumption:
24VDC | 100 mA max (Aux Powered)
16VDC | 100 mA max (DALI Bus Powered)

DALI: Complies with DALI D4i Specifications

Mounting: Mounts to Zhaga Book18 receptacle (PSC-ZAD-R1L) sold separately

Max Wireless Range¹:
1020 feet (310 meters)

Operating Temperature:
-22°F to 158°F (-30°C to 70°C)

Storage Temperature:
-40°F to 185°F (-40°C to 85°C)

Relative Humidity:
90-95% non-condensing at 30°C

Color: Clear/Transparent Housing

Warranty: 5 years



Note:

1. Wireless Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for Bluetooth range accuracy.

Project


Location/Type

Physical Dimensions

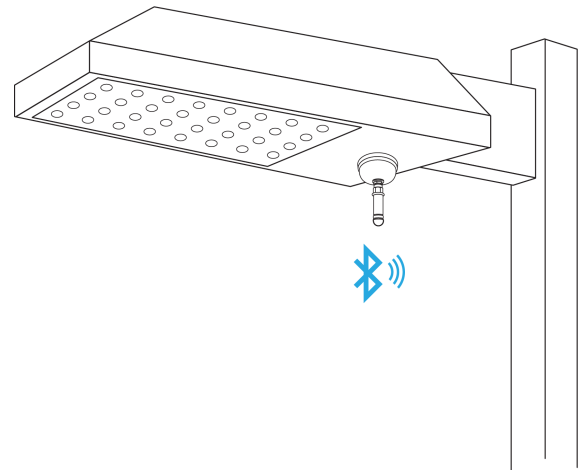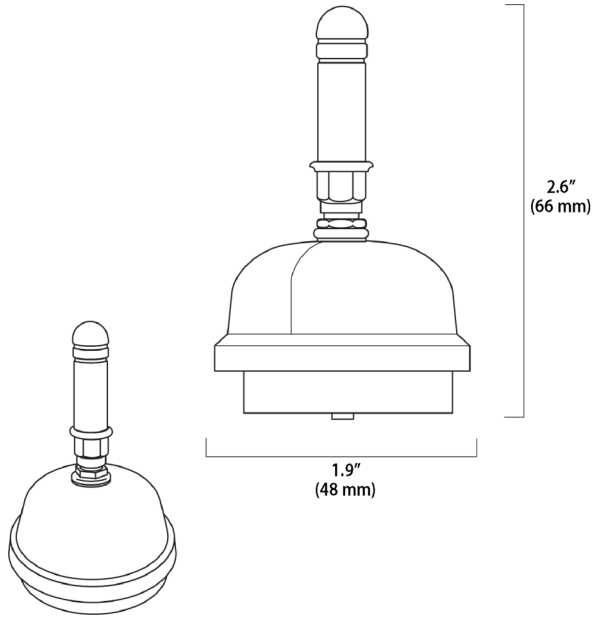


Drawings are not to scale

Product Wiring



View of Back of Device




View of Zhaga Book 18
Device Receptacle

Tab/Slot	Wiring Designation	
	-100 Aux Powered Models	-200 DALI Bus Powered Models
T1	24VDC+ Power to Sensor-Controller	Reserved
T2	DALI- (Negative DALI Bus) & 24VDC-Ground Power to Sensor-Controller	DALI (16VDC DALI Bus) Polarity Independent
T3	DALI+ (Positive DALI Bus)	DALI (16VDC DALI Bus) Polarity Independent
T4	Reserved	Reserved

For Wiring Diagrams featuring the PSC-ZAD product series, visit the following link:

<http://mwconnect.us/wiring/PSC-ZAD>

Installation of Device

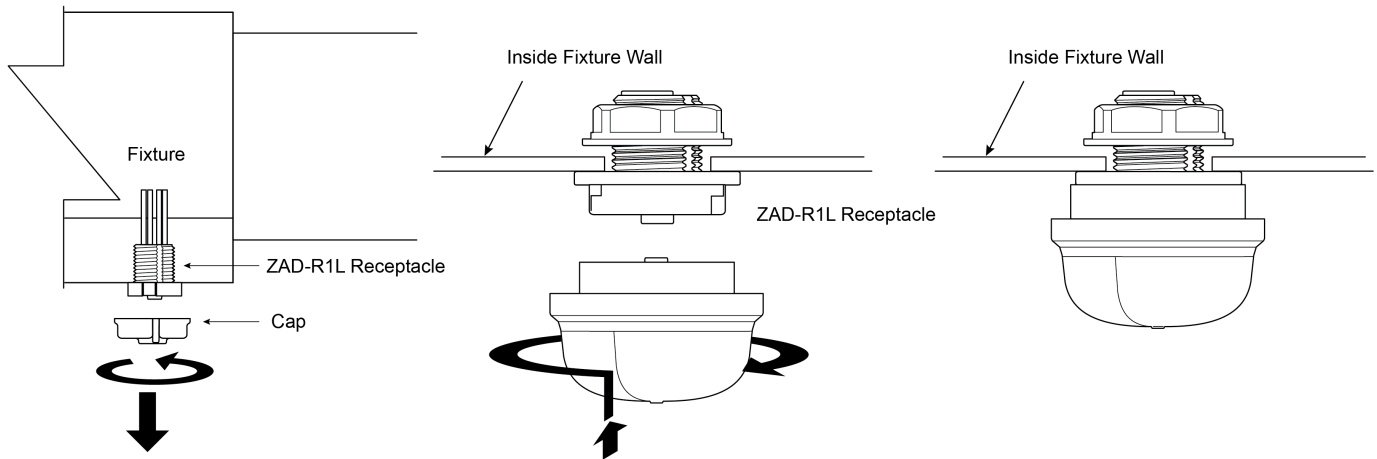

To install a ZAD device, first remove the protective cap on the Zhaga Book 18 receptacle by pushing up and rotating counterclockwise.

To install ZAD devices insert, push in and rotate clockwise to lock. No tools are required. Luminaires can be easily and quickly upgraded.

The receptacle for ZAD devices is typically installed by luminaire manufacturer and is shipped to job site with a protective cap.

How To Order

Model No.	Description	Input Voltage	Output
PSC-ZAD-WCM-100-WPS-NG/EXA	Ingy Wirepas Mesh Aux Powered DALI Controller with Long-Range Antenna, Clear Housing	24VDC	DALI
PSC-ZAD-WCM-200-WPS-NG/EXA	Ingy Wirepas Mesh DALI Bus Powered DALI Controller with Long-Range Antenna, Clear Housing	16VDC	DALI
PSC-ZAD-R1L	Zhaga Book18 Quick-Connect Receptacle for use with Sensor-Controllers, Black Finish		

Design and specifications are subject to change without notice.