

## Main Features:

- Input Voltage: 90~305Vac or 127~250Vdc
- Output Wattage: Constant Wattage (C.P.) at 200W with Adjustable Current Setting
- Programmable Method: Wire or Wireless
- High Efficiency: Up to **90%**
- Dimming Function: **0-10V**
- Auxiliaire Voltage : **12Vaux** with **300mA**
- Lightning Protection: Built-in Surge Protector at 10KV/5KA
- Reliability Protection: OVP, SCP, OTP
- Safety Regulation: Complies with UL8750 & EN61347
- **Type TL and HL** Program Certified from UL
- **Class P** UL standard for retrofit kit
- Waterproof Rating: IP67
- Five Year Warranty under Normal Usage Conditions



## SPECIFICATION

Model No. <sup>(i)</sup>	Output Voltage	Programmable Output	OVP	OTP	Case Temperature
	Range	Constant Current Range			
	(Vdc)	(mA) <sup>(i)</sup>	(Vdc max.)	(°C) <sup>(ii)</sup>	(Tc)
<b>LDD-200D190P1050-U-V</b>	114 - 286	700 - 1050	120% V <sub>Omax</sub> , typ.	T <sub>c</sub> ≥ 105 ± 10°C	90C
<b>LDD-200D143P1400-U-V</b>	86 - 190	1050 - 1400	120% V <sub>Omax</sub> , typ.	T <sub>c</sub> ≥ 105 ± 10°C	90C
<b>LDD-200D095P2100-U-V</b>	57 - 143	1400 - 2100	120% V <sub>Omax</sub> , typ.	T <sub>c</sub> ≥ 105 ± 10°C	90C
<b>LDD-200D048P4200-U-V</b>	29 - 71	2800 - 4200	120% V <sub>Omax</sub> , typ..	T <sub>c</sub> ≥ 105 ± 10°C	90C
<b>LDD-200D032P6300-U-V</b>	19 - 45	4400 - 6300	120% V <sub>Omax</sub> , typ..	T <sub>c</sub> ≥ 105 ± 10°C	90C
Note	(i) Pre-set Constant Current Value with dimming (ii) Lower the output current when T <sub>c</sub> ≥ 105 ± 10°C; Auto Recovery When T <sub>c</sub> ≤ 70 ± 10°C (iii) it is 240W model				

Input Spec.	Condition Description	Min.	Normal	Max.	Units
Input Voltage Range	Dedicated High Voltage Input	90	120-277	305	VAC
Input Frequency Range		47	50/60	63	Hz
Input Current	<b>110VAC/220 VAC input, full load output</b>			<b>1.9/0.9</b>	A
Power Factor	@60% - 100% load		>0.9		
THD (total harmonic distortion)	@60% - 100% load		<15		%
Inrush Current	At 230 VAC input, 25°C cold start / At 277 VAC input, 25°C cold start			65 / 70	A
Leakage Current	max @277Vac 60Hz			1.0	mA
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5				

Output Spec.	Condition Description	Min.	Normal	Max.	Units
Current Accuracy			±5		%
Ripple Current	At 100%-60% Load. The result differs according to different LED load characteristic.			5	% Ip-p (Io)
Overshoot/Undershoot	% of Iout max & LED load			10	%
Turn-On Delay	Startup time at cold start			1.2	s
Auxiliary Power (Vaux)	With 300mA max	-5%	12	+5%	Vdc


General Spec.	Condition Description	Min.	Normal	Max.	Units
Efficiency	Measured at full load in the thermal balanced condition		92	93	%
MTBF	measured at Tc= 75°C (MIL-HDBK-217F)		≥280,000		Hours
Lifetime	measured at Tc= 75°C		≥100,000		Hours
Operating/Storage Temperature	10%RH~100%RH (See De-rating Curve for more details)	-40/-40		70/85	°C
Dimension (OL/L x W x H)	OL is the overall length with mounting plates	201/175*68*38.5			mm
		7.91/6.89*2.68*1.52			inch
Weight	Net weight without package	1.87/0.85			lb/kg

Safety & EMC Compliance	Category	Condition Description
Safety Regulations	UL8750	Light Emitting Diode(LED) Equipment for Use in Lighting Products
	UL1012	Power Unit Other Than Class 2
	IEC 61347-1	Lamp Controlgear Part 1: General and Safety Requirements
	IEC 61347-2-13	Lamp Controlgear Part 2-13: Particular Requirement for d.c. or a.c. Supplied Electronic Controlgear for LED Modules
	CE	Europe: EN 61347-1, EN61347-2-13
EMI Standards	IEC 55015	Conducted emission test & Radiated emission test
	IEC 61000-3-2	Harmonic current emissions; Class C (≥75% load)
	IEC 61000-3-3	Voltage fluctuations & flicker
	FCC Part 15	Class B
EMS Standards	IEC 61000-4-2	Electrostatic discharge (ESD)
	IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
	IEC 61000-4-4	Electrical fast transient (EFT)
	IEC 61000-4-5	Surge immunity test L-N:2kV; LN-PE:4kV ( <a href="#">External Surge Protection Device 4KA/6KV or 6KA/10KV</a> )
	IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
	IEC 61000-4-8	Power frequency magnetic field test
	IEC 61000-4-11	Voltage dips
	IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

## ■ Dimming Curve


Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	200uA	300uA	450uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	
PWM High	3V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		

Dimming Wire

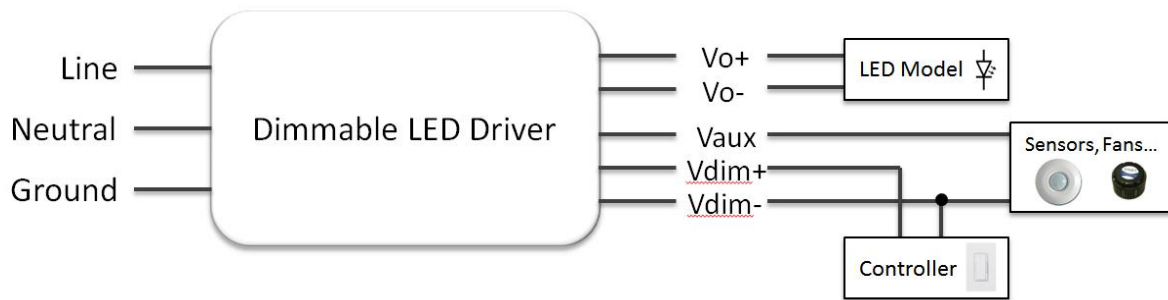


With dim-off (dto)


0-10V Dimming Curve

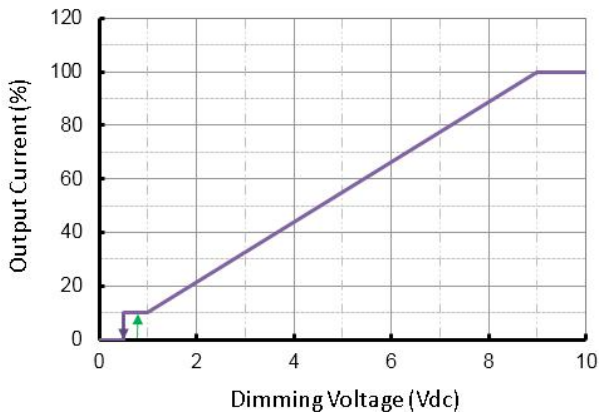


PWM Dimming Curve

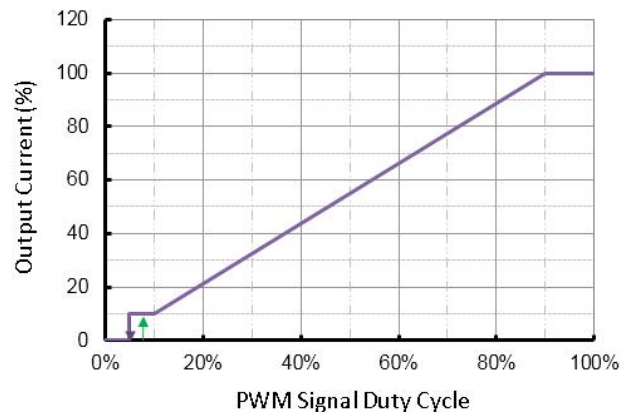


## ■ Lifetime vs. Case Temperature

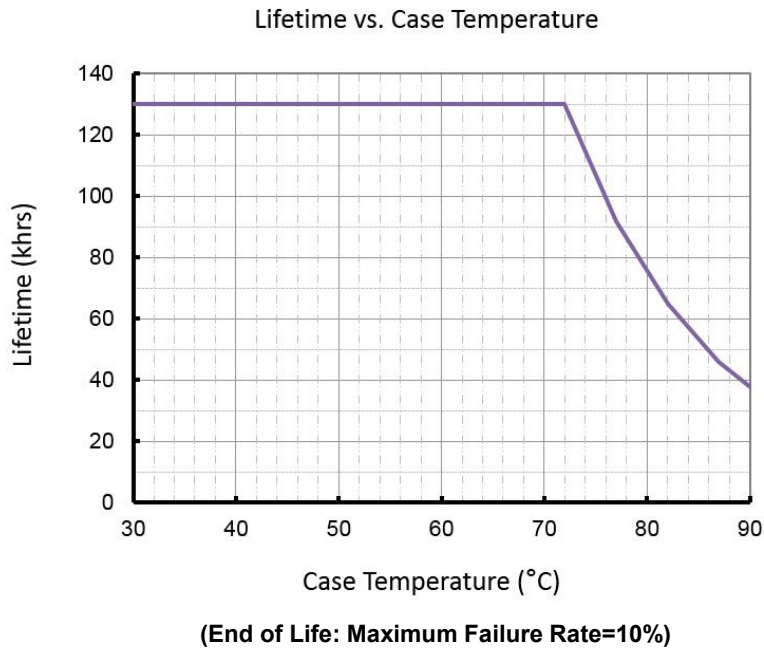

## ■ THD vs. Load

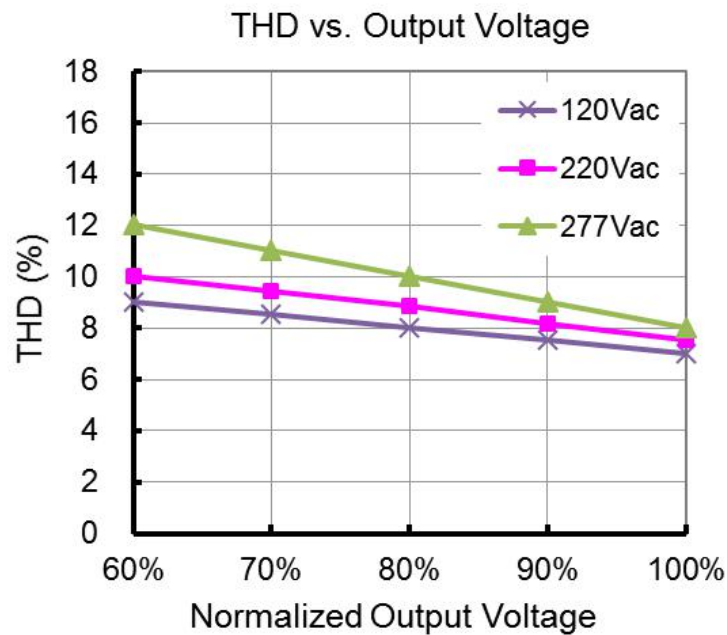

## ■ Current vs. Voltage Curve

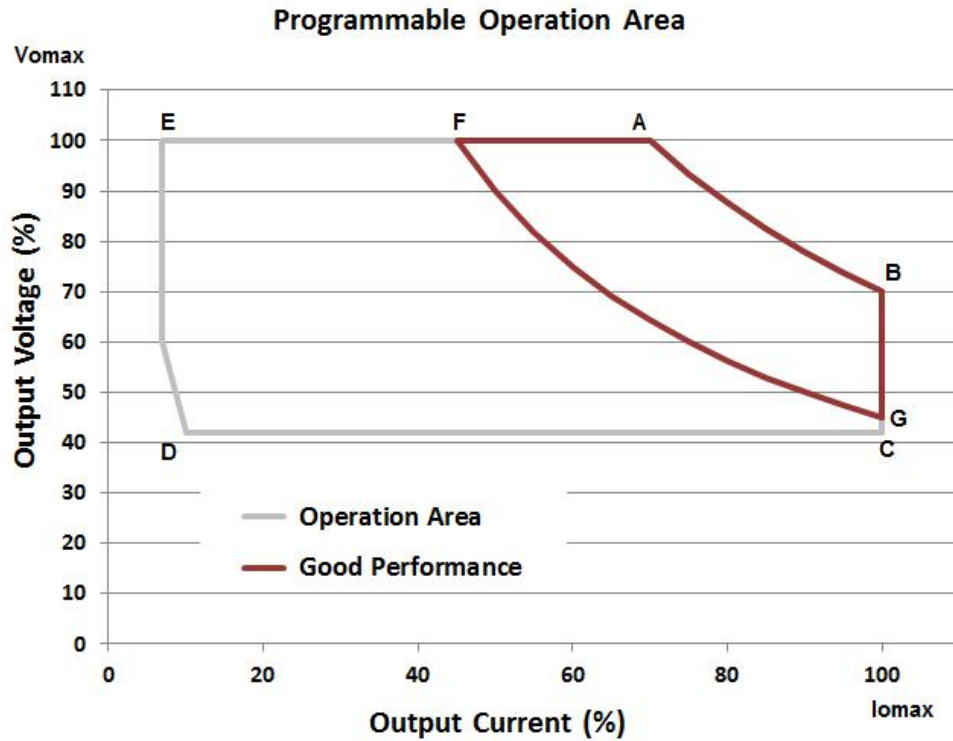

$I_o$ (mA)   $V_o$ (V)	<b>B</b> $I_{max}$ (Rated)	<b>A</b> $V_{max}$ (min I of C.P.)	<b>F</b> (60% of I at A)   (as $V_{max}$ )	<b>G</b> (as $I_{max}$ )   (60% of V at B)	<b>C</b> (as $I_{max}$ )   $V_{min}$ = (60% of V at B)	<b>D</b> (10% of $I_{max}$ )   (60% of V at B)	<b>E</b> (10% of I at A)   (as $V_{max}$ )
<b>LDD-200D190P1050-U-V</b>	<b>1050   190</b>	<b>700   286</b>	<b>420   286</b>	<b>1050   114</b>	<b>1050   114</b>	<b>105   114</b>	<b>70   286</b>
<b>LDD-200D143P1400-U-V</b>	<b>1400   143</b>	<b>1050   190</b>	<b>630   190</b>	<b>1400   86</b>	<b>1400   86</b>	<b>140   86</b>	<b>105   190</b>
<b>LDD-200D095P2100-U-V</b>	<b>2100   95</b>	<b>1400   143</b>	<b>840   143</b>	<b>2100   57</b>	<b>2100   57</b>	<b>210   57</b>	<b>140   143</b>
<b>LDD-200D048P4200-U-V</b>	<b>4200   48</b>	<b>2800   71</b>	<b>1680   71</b>	<b>4200   29</b>	<b>4200   29</b>	<b>420   29</b>	<b>280   71</b>
<b>LDD-200D032P6300-U-V</b>	<b>6300   32</b>	<b>4400   45</b>	<b>2640   45</b>	<b>6300   19</b>	<b>6300   19</b>	<b>630   19</b>	<b>440   45</b>
On <b>BA</b> Curve Line	<b>Constant Power Area</b>						
Within <b>BAFG</b> Box	<b>Good Performance Area</b>						
Within <b>ABCDE</b> Box	<b>Operational Area</b>						

## ■ Mechanical Outline (Unit: mm)

Note: Dimensions in millimeters, where 25.4 mm = 1 inch

Tolerance:  $\pm 0.51$  mm

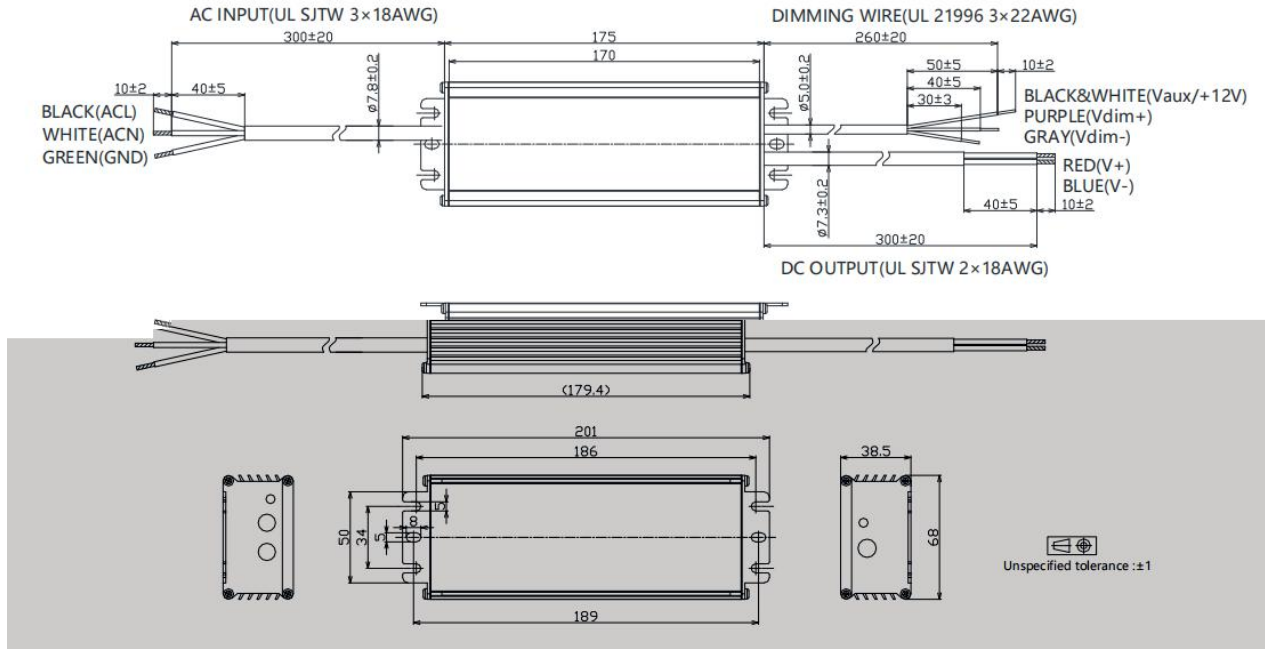
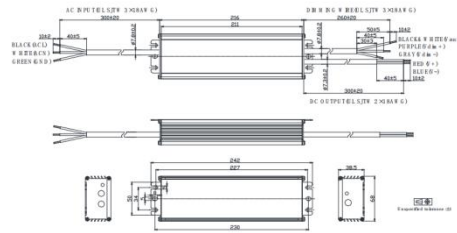
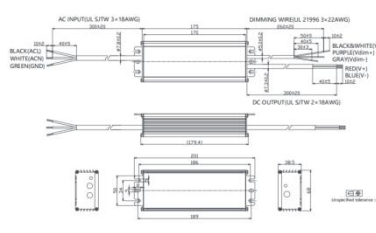


Figure 37, ARSPT

**Safety Note:** Please make sure the output cable does not connect to dimming cable or the cables of other drivers until 20 seconds after being tested because of the remained voltage in the output capacitor.

## Revision

Date	Rev	Description of Change																						
		Item	Old	New																				
12/18/2017	V2a	In Draft Release	/	/																				
07/02/2019	V2b	<table border="1"> <thead> <tr> <th>Input Spec.</th> <th>Condition Description</th> </tr> </thead> <tbody> <tr> <td>Input Voltage Range</td> <td>Dedicated High Voltage Input</td> </tr> </tbody> </table>	Input Spec.	Condition Description	Input Voltage Range	Dedicated High Voltage Input	<table border="1"> <thead> <tr> <th>Min.</th> <th>Normal</th> <th>Max.</th> <th>Units</th> </tr> </thead> <tbody> <tr> <td>180</td> <td>208-480</td> <td>528</td> <td>VAC</td> </tr> </tbody> </table>	Min.	Normal	Max.	Units	180	208-480	528	VAC	<table border="1"> <thead> <tr> <th>Min.</th> <th>Normal</th> <th>Max.</th> <th>Units</th> </tr> </thead> <tbody> <tr> <td>90</td> <td>120-277</td> <td>305</td> <td>VAC</td> </tr> </tbody> </table>	Min.	Normal	Max.	Units	90	120-277	305	VAC
		Input Spec.	Condition Description																					
Input Voltage Range	Dedicated High Voltage Input																							
Min.	Normal	Max.	Units																					
180	208-480	528	VAC																					
Min.	Normal	Max.	Units																					
90	120-277	305	VAC																					
12/31/2021	V2c	Mechanical Outline																						
		Inrush Current	At 277 VAC input, 25°C cold start / At 480 VAC input, 25°C cold start	At 230 VAC input, 25°C cold start / At 277 VAC input, 25°C cold start																				
		Weight	2.64/1.2	1.87/0.85																				