



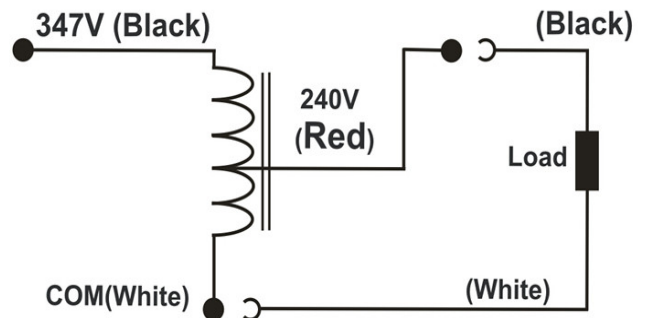

cUL[®] US RoHS ISO9001

| | |
|--------------|------------------------------|
| Model No. | MTM01003424C |
| Product Type | Step-down Transformer |
| Rating (VA) | 100 |
| Vin Vout | 347VAC 240VAC |
| Frequency | 60 Hz |
| Status | Production |

| | | | |
|---------------------------|----------------------------|----------------------|------------------|
| Input Voltage (V) | | 347 | |
| Max Input Circuit (A) | | 0.32 | |
| Max Output Circuit (A) | | 0.42 | |
| Max. Load(VA) | | 100 | |
| Output Voltage (V) | | 240 | |
| Full Load | EFF. (%) | 95 | |
| | THD (%) | 4.3 | |
| | Power Factor | 0.993 | |
| UL Class H 180 Temp. Code | | A | |
| Dimension (inches/mm) | Basic dimensions | A* | 2.36±0.04/60±1 |
| | | B(Max) | 3.35/85 |
| | | W | 1.65±0.04/42±1 |
| | | H | 1.34±0.04/34±1 |
| | Installation dimensions | M1 | 1.28/32.6 |
| | | M2 | 3.09±0.04/78.6±2 |
| | | M3 | 0.57/14.4 |
| | | M4 | 3.31±0.04/84±2 |
| | | L | 3.54±0.04/90±2 |
| | | Max Net Weight (lbs) | |
| Max Net Weight + LW (lbs) | | 1.33 | |
| Lead Length (inches) | | 8±0.5 | |

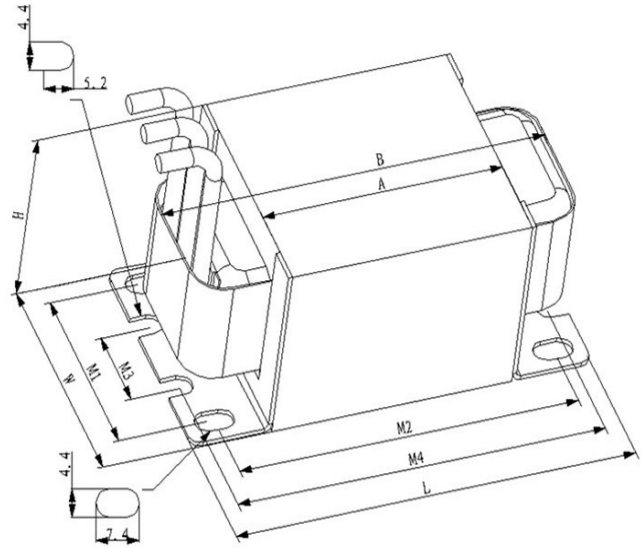

A* not covered the thickness of the two holders
 *Lead Type: (AVLV2, AVLV8), Type 3135, No. 18 AWG (or Equivalent), rated 200°C, 600 V. Strip 10mm Tin Plated.

Product Standards: UL 5085-1, UL 5085-2
 UL CCN: XPTQ2, XPTQ8

| | |
|---------------|----------------------------------|
| Document No.: | PS_MTM_VA0100_34-24_C_M03 |
| Date: | 2017-02-08 (yyyy-mm-dd) |