



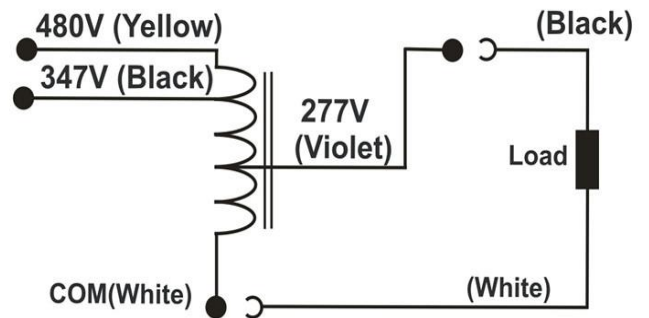

**cUL<sup>®</sup> US RoHS ISO9001**

Model No.	<b>MTM06756227CLW</b>
Product Type	<b>Step-down Transformer</b>
Rating (VA)	<b>675</b>
Vin   Vout	<b>480/347VAC   277VAC</b>
Frequency	<b>60 Hz</b>
Status	<b>Production</b>

Input Voltage (V)		480/347	
Max Input Circuit (A)		1.48/2.04	
Max Output Circuit (A)		2.43	
Max. Load(VA)		675	
Output Voltage (V)		277	
Full Load	EFF. (%)	94/96	
	THD (%)	2.4/2.2	
	Power Factor	0.997/0.997	
Insulation System		CLASS H(180° )	
Dimension (inches/mm)	Basic dimensions	A*	3.54±0.04/90±1
		B(Max)	4.92/125
		W	2.64±0.04/67±1
		H	2.20±0.04/56±1
	Installation dimensions	M1	2.27/57.6
		M2	4.28±0.04/108.6±2
		M3	0.96/24.4
		M4	4.49±0.04/114±2
		L	4.72±0.04/120±2
		Max Net Weight (lbs)	
Max Net Weight + LW (lbs)		5.39	
Lead Length (inches)		8±0.5	

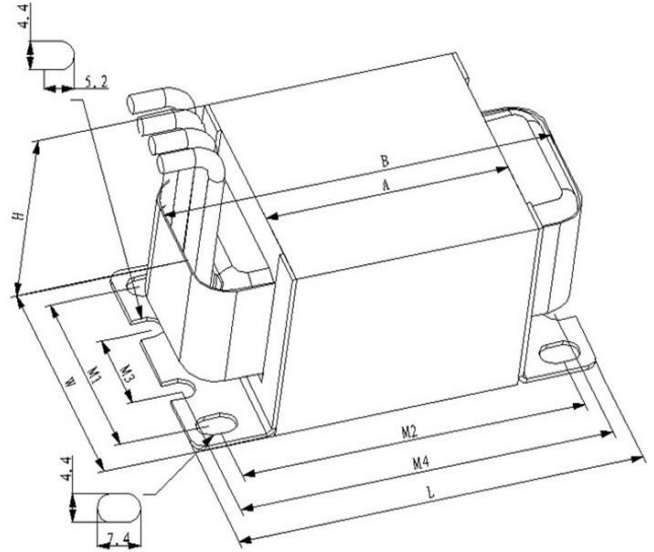

A\* not covered the thickness of the two holders  
 \*Lead Type: (AVLV2, AVLV8), Type 3135, No. 18 AWG (or Equivalent), rated 200°C, 600 V. Strip 10mm Tin Plated.  
 347V lead wire is pre-insulated.

Document No.:	<b>PS_MTM_VA0675_62-27_CLW_M03</b>
Date:	<b>2023-03-31 (yyyy-mm-dd)</b>

Product Standards: UL 5085-1, UL 5085-2  
 UL CCN: XPTQ2, XPTQ8