




MCWONG



Model No.	SPD-277P-20KA
Product Type	SPD Type 5
MCOV	320
Mains Voltage	120~277
Frequency	50/60 Hz
Status	Production

Mains Voltage (VAC)	277*	
Maximum Continuous Operating Voltage (VAC)	320	
Max Peak Current (8/20us)(KA)	In	5
	I _{max}	10
Combination Wave (1.2/50μs-8/20μs)(KV/KA)	V _n	10
	V _{max}	20**
Measured Limited Voltage (MLV)(V)	L-N	1890
	L-G	1900
	N-G	1870
Case Physical Parameters mm	Height (H)	65±1
	Top Diameter (D)	45±1
Operation Temperature(°C)	-40~+85	
IP Rating:	IP67	

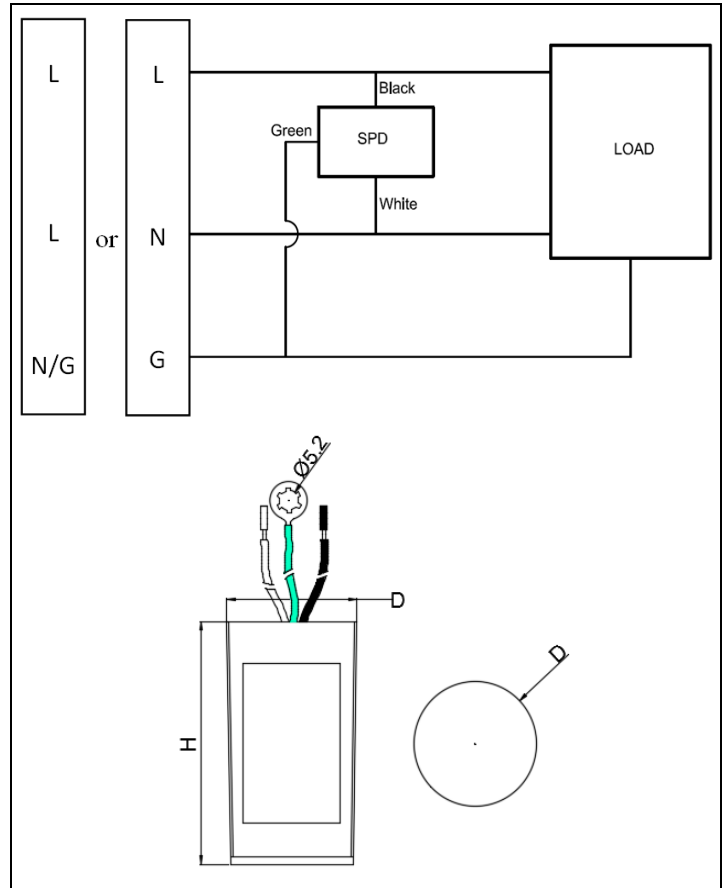

16 AWG Lead wire length (mm)	Black (Strip 10mm Tin Plated)	180±5
	White (Strip 10mm Tin Plated)	200±5
	Green (standard with Eyelet Ø5.2) * SPD-277P-20KA /N for option without Eyelet	260±5

* CAUTION: For use only with LED Drivers/Ballasts with dedicated input voltage 277VAC, or with universal input voltage ranges from 120~277VAC

**V_{max}: Limited by test equipment max ratings

Overview:

- Protects against surges according to UL1449 and IEEE C62.41.2 C
- Can be used with LED Driver, e-HID Ballast, Electronic Fluorescent Ballast, Induction Generator

Document No:	PS_SPD-277P-20KA_M03
Date:	2020-10-02 (yyyy-mm-dd)