



MCWONG



| | |
|---------------|---------------|
| Model No. | SPD-347P-20KA |
| Product Type | SPD Type 5 |
| MCOV | 420 |
| Mains Voltage | 347 |
| Frequency | 50/60 Hz |
| Status | Production |

| | | |
|--|------------------|------|
| Mains Voltage (VAC) | 347* | |
| Maximum Continuous Operating Voltage (VAC) | 420 | |
| Max Peak Current (8/20us)(KA) | In | 10 |
| | I _{max} | 20** |
| Combination Wave (1.2/50μs-8/20μs)(KV/KA) | V _n | 20 |
| | V _{max} | 20* |
| Measured Limited Voltage (MLV)(V) | L-N | 2580 |
| | L-G | 2640 |
| | N-G | 2570 |
| Case Physical Parameters mm | Height (H) | 65±1 |
| | Top Diameter (D) | 45±1 |
| Operation Temperature(°C) | -40~+85 | |
| IP Rating | IP67 | |

| | | |
|------------------------------|---|-------|
| 16 AWG Lead wire length (mm) | Black (Strip 10mm Tin Plated) | 180±5 |
| | White (Strip 10mm Tin Plated) | 200±5 |
| | Green (standard with Eyelet Ø5.2) * SPD-347P-20KA /N for option without Eyelet | 260±5 |


* CAUTION: For use only with LED Drivers/Ballasts with dedicated input voltage 347VAC, or with input voltage ranges from 120~347VAC, or 277~347VAC

**V_{max}: Limited by test equipment max ratings

Overview:

* Protects against surges according to UL1449 and IEEE C62.41.2 C.

* Can be used with LED Driver, e-HID Ballast. Electronic Fluorescent Ballast, Induction Generator

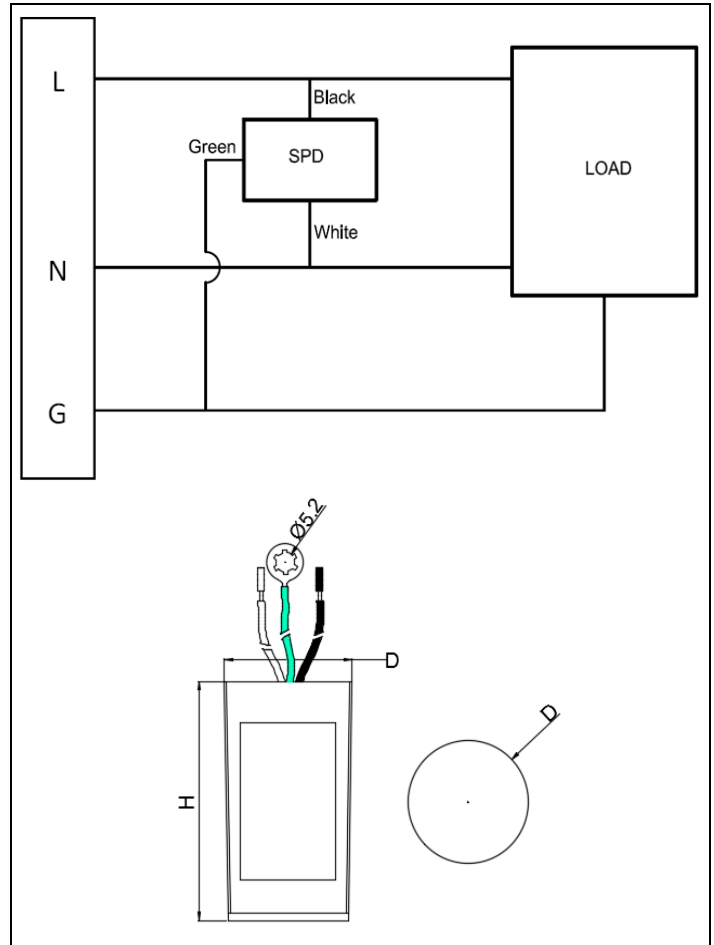

| | |
|--------------|-------------------------|
| Document No: | PS_SPD-347P-20KA_M01.1 |
| Date: | 2020-10-02 (yyyy-mm-dd) |