




MCWONG



Model No.	SPD-480P-10KA
Product Type	SPD Type 5
MCOV	550
Mains Voltage	480
Frequency	50/60 Hz
Status	Production

Mains Voltage (VAC)	480*	
Maximum Continuous Operating Voltage (VAC)	550	
Max Peak Current (8/20us)(KA)	In	5
	I _{max}	10
Combination Wave (1.2/50μs-8/20μs)(KV/KA)	V _n	10
	V _{max}	20
Measured Limited Voltage (MLV)(V)	L-N	2170
	L-G	2170
	N-G	2170
Case Physical Parameters mm	Height (H)	64±1
	Top Diameter (D)	35±1
Operation Temperature(°C)	-40~+85	
IP Rating	IP67	

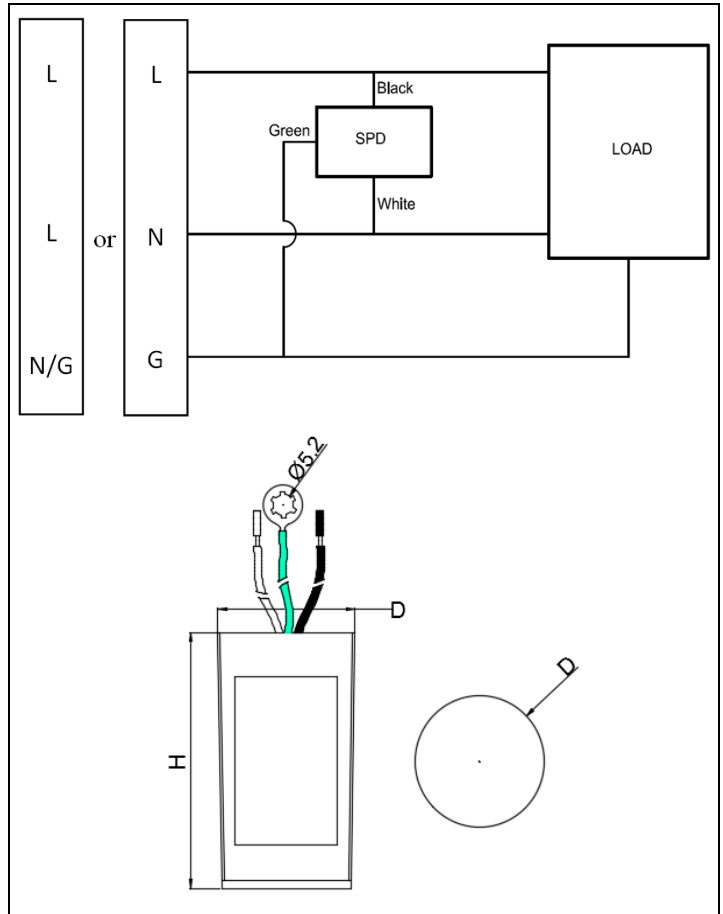

16 AWG Lead wire length (mm)	Black (Strip 10mm Tin Plated)	200±5
	White (Strip 10mm Tin Plated)	200±5
	Green (standard with Eyelet Ø5.2)	260±5
	* SPD-480P-10KA /N for option without Eyelet	

* CAUTION: For use only with LED Drivers/Ballasts with dedicated input voltage 480VAC, or with input voltage ranges from 277~480VAC, or 347~480VAC

Overview:

- Protects against surges according to UL1449 and IEEE C62.41.2 C.
- Can be used with LED Driver, e-HID Ballast. Electronic Fluorescent Ballast, Induction Generator

Document No:	PS_SPD-480P-10KA_M01.1
Date:	2020-10-02 (yyyy-mm-dd)